



常州西莱特电力科技有限公司  
CHINA SEALINE COMPANY LIMITED

# Sealine

## CHINA SEALINE COMPANY LIMITED

TEL: 0086-519-81298533

FAX: 0086-519-81298531

ADD: NO. 9<sup>TH</sup>, HONGXI RD., NIU TANG, CHANGZHOU, JIANGSU, CHINA

### MARKET DIRECTOR DEPT

CONTACT PERSON: MS Amy Xu Yang PH: 86-18651227827

EMAIL: master@sealinepower.com

### SALES DEPT


CONTACT PERSON: MS Winnie PH: 86-18118026181

EMAIL: manager@sealinepower.com

### AFTER SALES SERVICE DEPT

EMAIL: purchase@sealinepower.com

[www.sealinepower.com](http://www.sealinepower.com)

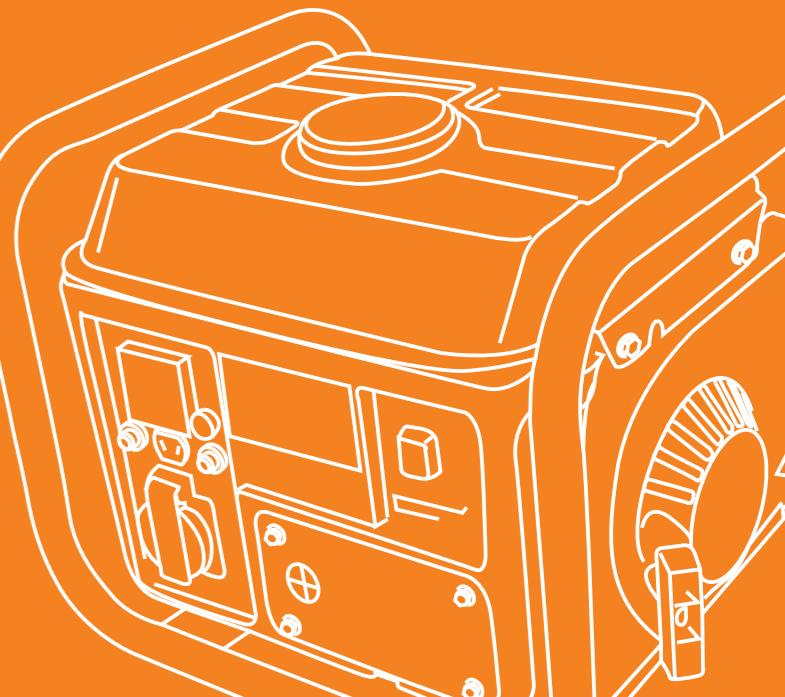



**POWER Sealine**  
**FLY TO YOUR SIDE**



# CONTENTS 目录



- 01 COMPANY PROFILE 公司简介 01-02
- 02 DIESEL ENGINE 柴油动力 05-06
- 03 DIESEL GENERATOR SET 柴油发电机组 07-12
- 04 GASOLINE GENERATOR SET 汽油发电机组 13-14
- 05 WATER PUMP 水泵 15-16
- 06 POWER TILLER 旋耕机 17-18
- 07 HIGH PRESSURE WASHER MACHINE SERIES 高压清洗机 19-20
- 08 MOBILE LIGHT TOWER SERIES 移动灯塔 21-22
- 09 CONSTRUCTION SERIES 建筑机械系列 23-27
- 10 SPARE PARTS-SOCKET 配件-插座 28

# >>> COMPANY PROFILE <<<

China Sealine Company Limited is engaged in research, development, manufacture and selling in various kinds of Engine, Generator, Water Pump, Building machinery. The company with 10,000 square meters workshop and employs more than 100 staff workers. It operates an advanced production line with whole set of inspection and testing equipment and a yearly capacity of 200, 000 sets of machines. The company get through EPA, CE, SONCAP, GS, ROHS and ISO9001 Certificate.

"Reputation is the first, Consumers are GOD" is our persistent working tenet. We serve the consumers with high quality, reasonable price, perfect service and flexible working way.

We warmly welcome customers to contact us for more information about our products and services. We are looking forward to your kind enquires and comments on our website at any time with your pleasure.

# Dimension of diesel engine flange and output shaft


# 柴油机法兰和输出轴尺寸

unit (单位) : mm


Model 类型	Crankshaft 曲轴输出		
	Keyway shaft 键槽轴	Thread shaft 螺纹轴	Taper shaft 锥度轴
Application code 代码	F1/F2	FP1/FP2	FG1/FG2
170			
178			
186/188			

Camshaft PTO 凸轮轴输出		PTO Flange 输出法兰	
Keyway shaft 键槽轴	Camshaft PTO 凸轮轴输出	Camshaft PTO 凸轮轴输出	Crankshaft PTO 曲轴输出

Performance Curves: 性能曲线:

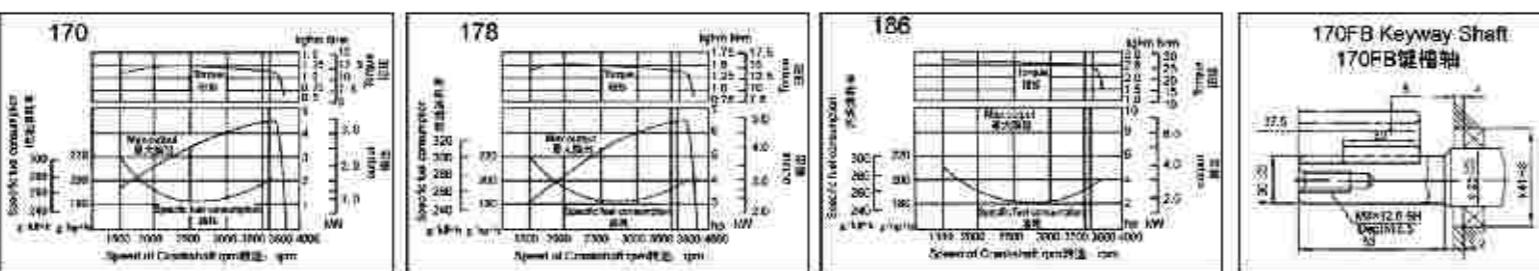

Performance measured after 30 hours running-in,  
with air cleaner and exhaust silencer.  
Atmospheric conditions: ISO 3046/1  
Intake air temperature: 20°C[27°C] 60%[80%]  
以上性能曲线为带空滤。若声器运行30小时后测量。  
大气条件: ISO 3046/1进气温度: 20°C[27°C] 相对湿度: 60%[80%]

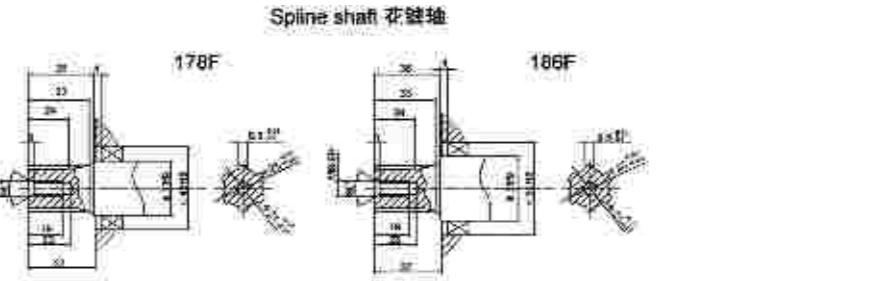



>>> AIR-COOLED  
DIESEL ENGINE SERIES  
风冷柴油动力 <<<

# >>> OPEN TYPE DIESEL GENERATOR

开架柴油发电机组 <<<



Model 型号	SDG2500(E)	SDG3000(E)	SDG5000(E)	SDG6000(E)
Rated Frequency (Hz) 频率			50/60	
Rated Voltage (V) 额定电压	110,120,220,230,240	220/380	240/400	
Rated output (kw) 额定功率	1.8/2.0	2.8/3.0	4.2/4.6	4.6/5.0
Max. Output (kw) 最大功率	2.0/2.2	3.0/3.3	4.6/5.0	5.0/5.5
Power factor ( $\cos\phi$ ) 功率因数	1 / 0.8(Three Phase)			
Structure type 款式	Open-frame Structure			
Fuel Tank capacity (L) 油箱容积	12.5			
Continuous running time (H) 持续工作时间	17/14.5	9.7/9	7.1/6.5	6.5/6.0
Noise level (dba/7m) 噪音等级 7米	80-85			
Engine model 发动机型号	SE170F/SE170FE	SE178F/SE178FE	SE186F/SE186FE	SE186FA/SE186FAE
Starter system 启动系统	Recoil starter/Electric starter 手启动/电启动			
Fuel type 燃油	0 # (Summer) -10 # (Winter) Diesel oil			
Lube oil brand 润滑油	SAE10w30 (above cc grade)			
Net weight (kg) 净重	53/60	65/70	95/100	95/100
Overall dimension (mm) 尺寸	575 × 400 × 500	640 × 480 × 530	720 × 492 × 650	720 × 492 × 650
20FT Loading PCS 装柜数量	150	130	102	102
Optional Features 选用配置	Dc Circuit Breaker 直流保护器、Hour Meter 计时器、Big Wheel 大轮子、Three Phase Voltage 三相电压、Romote Control 遥控 , ATS			



CHINA SEALINE  
COMPANY LIMITED  
常州西莱特电力科技有限公司

Sealine POWER  
YOUR BEST POWER SELECTION  
07/08

## >>> SILENT TYPE DIESEL GENERATOR

静音柴油发电机组 <<<



Model型号	SDG3500SE	SDG5500SE	SDG6500SE	SDG7500SE
Rated Frequency (Hz) 频率			50/60	
Rated Voltage (V) 额定电压		110,120,220,230,240	220/380	240/400
Rated output (kw) 额定功率	2.8/3.0	4.2/4.6	4.6/5.0	5.0/5.5
Max. Output (kw) 最大功率	3.0/3.3	4.6/5.0	5.0/5.5	5.5/6.0
Power factor ( $\cos\phi$ ) 功率因数			1/0.8(Three Phase)	
Structure type 款式			Silent Structure	
Fuel Tank capacity (L) 油箱容积			16	
Continuous running time (H) 持续工作时间	13/11.8	10.2/9.3	8.5/7.8	8.5/7.8
Noise level (dba/7m) 噪音等级7米			68-72	
Engine model 发动机型号	SE178FE	SE186FE	SE186FAE	SE188FE
Starter system 启动系统			Electric starter 电启动	
Fuel type 燃油			0 # (Summer) -10 # (Winter) Diesel oil	
Lube oil brand 润滑油			SAE10w30 (above cc grade)	
Net weight (kg) 净重	140	150	150	160
Overall dimension (mm) 尺寸			910 × 530 × 740	
20FT Loading PCS装柜数量			72	
Optional Features 选用配置	Dc Circuit Breaker 直流保护器、Hour Meter 计时器、Big Wheel 大轮子、Three Phase Voltage 三相电压、Romote Control 遥控 , ATS			

Model 型号	SDG8500SE	SDG12000SE	SDG15000SE	SDG16000SE
Rated Frequency (Hz) 频率		50/60		
Rated Voltage (V) 额定电压		110,120,220,230,240	220/380	240/400
Rated output (kw) 额定功率	6.0/6.5	8.5/9.0	9.0/10.0	10.0/10.5
Max. Output (kw) 最大功率	6.5/7.0	9.0/9.5	10.0/11.0	11.0/11.5
Power factor ( $\cos\phi$ ) 功率因数		1 / 0.8(Three Phase)		
Structure type 款式		Silent Structure		
Fuel Tank capacity (L) 油箱容积	16	30		
Continuous running time (H) 持续工作时间		8.5/7.8	9.4/8.4	
Noise level (dba/7m) 噪音等级7米		68-72		
Engine model 发动机型号	SE192FE	2V86	2V88	292
Starter system 启动系统		Electric starter 电启动		
Fuel type 燃油		0 # (Summer) -10 # (Winter) Diesel oil		
Lube oil brand 润滑油		SAE10w30 (above cc grade)		
Net weight (kg) 净重	160	260	265	270
Overall dimension (mm) 尺寸	910 × 530 × 740		1230 × 750 × 840	
20FT Loading PCS装柜数量	72		26	
Optional Features 选用配置	Dc Circuit Breaker 直流保护器、Hour Meter 计时器、Big Wheel 大轮子、Three Phase Voltage 三相电压、Romote Control 遥控 , ATS			

## >>> DIESEL WELDER & GENERATOR SERIES

柴油电焊机组 <<<



	Model型号	SDG6000EW	SDG6500SEW
GENERATOR 发电机	Frequency 频率 ( HZ )	50/60HZ	
	Rated.AC voltage 额定电压 ( V )	230/240	
	Rated Current 额定电流 (A)	7.8/9.2	
	Rated output 额定输出 ( kw )	1.8/2.2	
	Rated speed 额定转速 (rpm)	3000/3600	
Welder 焊接	Welding no-load voltage 焊接空压 ( V )	55-65	
	Working voltage 工作电压 (V)	26-30	
	Rated Current 额定电流 (A)	160	
	Range of current 电流范围 (A)	20-220	
	Welding efficiency 焊接效率	0.6	
	Power factor 功率因素 (cos φ )	1	
	Phase 相数	1	
	Noise level(at 7m) 7米处噪音	80-85db	68-72db
ENGINE 发动机	Model型号	SE186FA	
	Engine type 动力形式	single-cylinder, vertical, 4-stroke air-cooled diesel engine 单缸，直立四冲程，风冷柴油机	
	Bore × stroke 缸径×行程 ( mm )	86×72	
	Displacement Capacity 排量 (cc)	418cc	
	Fuel 燃油	0# or -10# light diesel oil 0#或-10#清洁柴油	
	Lubrication oil volume 润滑油容量 (L)	1.65	
	Combustion system 燃烧系统	Direct Injection 直喷式	
STANDARD FEATURES 标准配置	Voltmeter 电压表、AC Output Socket 交流插头、AC Circuit Breaker 交流开关、Oil warning Light 油压警告灯、Oil Alert 机油报警器		
DIMENSIONS 尺寸	Dimension(LxWxH)(cm) 尺寸	70*47*60	95*53*77
	Net Weight(kgs) 净重	102	170
	20FT loading pcs 20尺平柜装柜数量	102	72

OPTIONAL FEATURES 选用配置 : Dc circuit breaker 直流保护器、Calculagraph 计时器、Big wheel 大轮子、Three phase voltage 三相电压、Current meter 电流表、ATS、Remote control 遥控

# >>> GASOLINE GENERATOR OPEN TYPE SERIES 升架汽油机组<<<



	Model 型号		SGG1500		SGG2500		SGG3500		SGG3800		SGG5000		SGG6000		SGG7000	
Generator 发电机	Frequency (Hz) 频率	50	60	50	60	50	60	50	60	50	60	50	60	50	60	50
	AC output voltage(V) 电压	110,120,220,230,240,110/220,120/240														
	Rated AC output(kw) 额定输出	1	1.1	2	2.3	2.5	2.7	2.8	3.3	4	4.5	5	5.5	6	6.5	
	Max.AC output(kw) 最大输出	1.1	1.5	2.2	2.5	2.8	3	3.1	3.6	4.5	5	5.5	6	6.5	7	
	DC output 直流输出	12V/8.3A														
	Model 型号	SE154		SE160		SE160		SE173		SE188		SE188		SE190		
Engine 动力	Starting system 启动方式	Recoil or electric 手启动/电启动														
	Fuel tank capacity(L) 油箱容量	4.2		15		15		25		25		25		25		
	Lubrication oil volume(L) 润滑油容量	0.37		0.6		0.6		1.1		1.1		1.4		1.4		
	Dimension (L×W×H)mm 尺寸	430×345×315		590×440×450		590×440×450		680×510×540		680×510×540		680×510×540		680×510×540		
Dimensions 尺寸	Net weight(kg) 净重	26		41		43		65		76		80		85		
	20FT 装柜数量	580		230		230		136		136		136		136		



	Model 型号	SGG1500E	SGG16000E	SGG17000E
GENERATOR 发电机	Frequency (HZ) 频率	50HZ		
	Max.output (kw) 最大输出	11	13	16
	Rated output(kw) 额定输出	10	12	15
	Rated AC Voltage(V) 额定电压	220V		
	Fuel Tank Capacity (L) 燃油箱容量	30L		
	Starting System 启动系统	Electric starting		
ENGINE 动力	Engine Model 型号	CH680	CH730	CH740
	Engine Type 动力形式	4-stroke, 2 cylinders, air cooled		
	Bore [mm(in.)] 缸径	80(3.1)	83(3.3)	83(3.3)
	Stroke[mm(in.)] 行程	67(2.6)		
	Displacement[cu in(cc)] 排量	41.1(674)	44.2(725)	44.2(725)
	power KW(HP) 功率	16.8(22.5*)	17.5(23.5*)	18.6(25*)
	Compression Ratio 燃烧比	8.5:1	9.0:1	9.0:1
STANDARD FEATURES 标准配置	Voltmeter 电压表、AC Output Socket 交流插头、AC Circuit Breaker 交流开关、Oil Alert 机油报警器			
	DIMENSIONS 尺寸	Dimension(LxWxH)(cm) 尺寸		88*59*91
		Net Weight(kgs) 净重		162



**CHINA SEALINE  
COMPANY LIMITED**  
常州西莱特电力科技有限公司

**Sealine** POWER  
YOUR BEST POWER SELECTION

**15/16**

## >>> AIR-COOLD DIESEL WATER PUMP SET 风冷柴油水泵机组 <<<




Model 型号		DP20	DP30	DP40	DP60	DP15H	DP20H	DP30H
WATER PUMP 水泵	Suction,discharge port diameter [mm(in)] 进出水口径	50(2")	80(3")	100(4")	150(6")	40(1.5")	50(2")	80(3")
	HP马力	4	6	9	13	6	9	12
	Cont.head(m)扬程	26	28	31	15	60	55	75
	Self-priming time (s/4m)自吸时间	70	120	180	200	30	30	30
	Max suction head (m)最大吸程	8		6		8		
	Cont.capacity(m3/hr)	36	50	96	180	18	23	47
ENGINE 动力	Engine model动力型号	SE170F	SE178F	SE186F	SE192FB	SE178F	SE186F	SE188FA
	Speed(rpm)转速	3000 / 3600		3200		3000/3600		
	Type动力形式	Single-cylinder,vertical,4-stroke air-cooled diesel engine单缸四冲程柴油机						
	Displacement(cc)排量	211	296	406	498	296	406	456
	Bore×stroke (mm)缸径×行程	70×55	78×62	86×70	92×75	78×62	86×70	88×75
	Starting system启动系统	Recoil or Electric手启动/电启动						
	Fuel tank capacity(L)油箱容量	2.5	3.5	5.5	5.5	3.5	5.5	5.5
OPTIONAL FEATURES 选用配置	Luxury big fuel tank豪华大油箱							
DIMENSIONS 尺寸	Dimension(L×W×H)(mm)尺寸	475×400×515	540×440×540	645×475×605	790×560×870	540×440×540	645×475×605	645×475×605
	Dry weight(kg)净重	35	52	69	120	42	69	75
	20FT	180	140	99	56	120	99	108



Model 型号		DWB30	WP20V	WP30V
WATER PUMP 水泵	Suction,discharge port diameter [mm(in)] 进出水口径	80(3")	50(2")	80(3")
	Cont.head(m)扬程	25	10	12
	Self-priming time (s/4m)自吸时间	120	70	120
	Max suction head (m)最大吸程	7		
ENGINE 动力	Cont.capacity(m3/hr)	45	30	40
	Engine model动力型号	SE178F		
	Speed(rpm)转速	3600		
	Type动力形式	Single-cylinder,vertical,4-stroke air-cooled diesel engine 单缸四冲程柴油机		
	Displacement(cc)排量	296		
	Bore×stroke (mm)缸径×行程	78×62		
	Starting system启动系统	Recoil or electric with battery 手启动/电启动		
OPTIONAL FEATURES 选用配置	Fuel tank capacity(L)油箱容量	3.5		
	Luxury big fuel tank 豪华大油箱, Electric Start 电启动			
DIMENSIONS 尺寸	Dimension(L×W×H)(mm)尺寸	825×520×640		
	Dry weight(kg)净重	92		
	20FT	84		

Model 型号		DP15HCl	DP20HCl	DP30HCl	DP30HHCl	DP30HDCl			
WATER PUMP 水泵	Suction,discharge port diameter [mm(in)] 进出水口径	40(1.5")	50(2")	80(3")	80(3")	80(3")			
	HP马力	6	10	10	12	13			
	Cont.head(m)扬程	75	90	75	105	60			
	Self-priming time (s/4m)自吸时间	NO							
	Max suction head (m)最大吸程	8							
	Cont.capacity(m3/hr)	28	35	47	42	90			
ENGINE 动力	Engine model动力型号	SE178F	SE186FA	SE186FA	SE188FA	SE192FB			
	Speed(rpm)转速	3000/3600							
	Type动力形式	Single-cylinder,vertical,4-stroke air-cooled diesel engine							
	Displacement(cc)排量	296	418	418	456	498			
	Bore×stroke (mm)缸径×行程	78×62	86×72	88×75	92×75				
	Starting system启动系统	Recoil or Electric 手启动/电启动							
	Fuel tank capacity(L)油箱容量	3.5	5.5						
OPTIONAL FEATURES 选用配置	Luxury big fuel tank 豪华大油箱								
DIMENSIONS 尺寸	Dimension(L×W×H)(mm)尺寸	645×475×605							
	Dry weight(kg)净重	75	80	85	90	95			
	20FT	108							

>>> POWER TILLER  
旋耕机 <<<

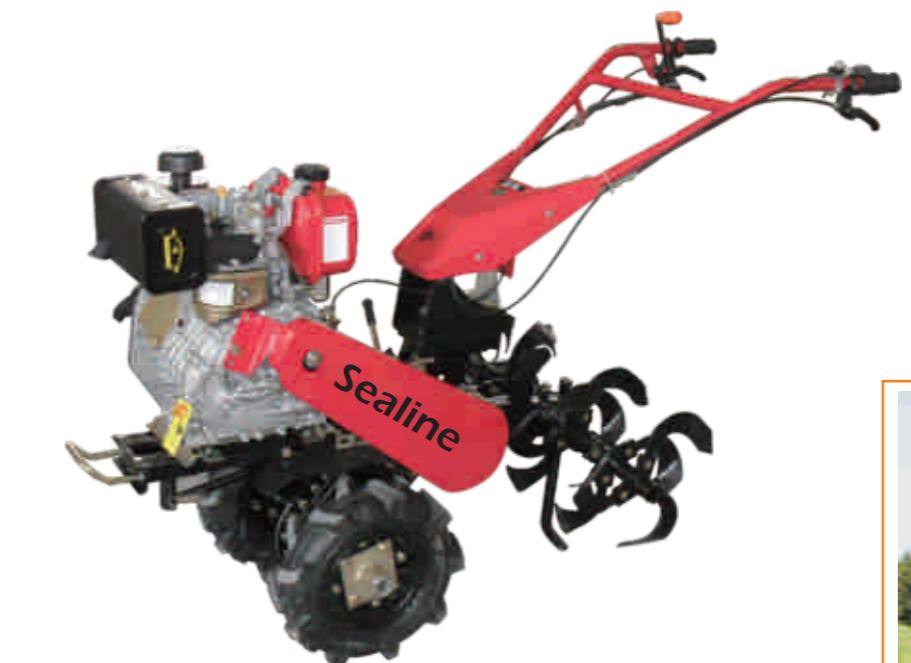

	Model 型号	WG3.5-FC	WG4.0-FC	WG6.5-FC	WG7.5-FC	WG3.8 - FQ
Engine 动力	Model型号	SE170FB	SE178F	SE186FA	SE188FA	SE170F Gasoline engine
	Rated power额定功率kw	3.5	4	6.5	7.5	3.8
	Engine speed转速r/min	3600				
Power tiller 耕耘机	M.T ( mm ) 尺寸	840×600×900	1210×690×1030	1210×690×1030	840×600×900	
	Weight ( kg ) 净重	90	115	130	140	75
	Working width ( cm ) 幅宽	100	105	135		100
	Working depth ( cm ) 耕深	≥10			≥15	≥10
	Working speed ( m/s ) 作业速度	0.1-0.3				
	Hour production ( hm <sup>2</sup> /h·m ) 小时生产率	≥0.04				
	Fuel consumption ( kg/hm <sup>2</sup> ) 主燃料消耗率	≤30	≤25.0	≤20	≤18	≤30
Roll turing 刀辊	Drive way传动方式	Gear				Gear
	Connection method连接方式	Direct coupled gearbox				
	Designed speed ( r/min ) 设计速度	First Gear:115; Second Gear:137				
	Blade diameter ( mm ) 最大回转直径	180				
	20FT qty装柜数	50	26			50

CHINA SEALINE  
COMPANY LIMITED  
常州西莱特电力科技有限公司

Sealine POWER  
YOUR BEST POWER SELECTION  
19/20



## >>> HIGH PRESSURE WASHER 高压清洗机 <<<

### GASOLINE ENGINE HIGH PRESSURE WASHER MACHINE SERIES



Model 型号		GHPW-2200
Pump 泵	Pump type 水泵形式	Radio-pump(Crankshaft output)
	Pump Model 泵型号	SML1507
	Rated Pressure bar(PSI) 出水压力	154(2200)
	Flow Rate L/min(GPM) 流速	8.3(2.2)
Engine 发动机	Engine model 动力型号	Se160
	Bore×Stroke(mm) 缸径×行程	68×45
	Engine Type 动力形式	OHV 4-stroke
	Displacement(cc) 排量	163
	Continuous Output(kw) 持续工作时间	5.5
	Starting System 启动系统	Recoil/Electric
	Speed(rpm) 转速	3400
	Fuel Tank Capacity(L) 油箱容量	3.6
	Oil Capacity(L) 润滑油容量	0.6
	Dimensions 尺寸	680×415×540
Net Weight(kg) 净重		32

#### Characteristics:

- 1) 6mm×8m(25ft) steel braid high-pressure hose, 22×1.5 in
- 2) Professional trigger gun with quick disconnect nozzles, spray patterns 0°, 25°, 45° and soap.
- 3) 5.5hp Gasoline engine with low oil protection
- 4) Pressure gauge options.

### MOTOR HIGH PRESSURE WASHER MACHINE SERIES



Model 型号		DHPW2200	DHPW2600	DHPW2900	DHPW3600	GHPW2200
Pump 泵	Pump type 泵型号	Radio-pump(Crankshaft output)				
	Rated Pressure bar(PSI)	154(2200)	174(2600)	193(2900)	248(3600)	154(2200)
	Flow Rate L/min(GPM)	9.8(2.6)	9.8(2.6)	10(2.65)	14(3.7)	8.3(2.2)
Engine 动力	Engine Model 型号	SE178F	SE178F	SE178F	SE186F	SE160
	Bore×Stroke 缸径×行程	78×62	78×62	78×62	86×70	68×45
	Engine Type 动力形式	Single cylinder, vertical, 4-stroke air-cooled diesel engine			gasoline engine	
	Displacement(cc) 排量	296	296	296	406	163
	Continuous Output(kw) 持续工作时间	4	4	4	6.3	5.5
	Starting System 启动系统	Recoil/Electric				
	Fuel Tank Capacity(L) 油箱容量	3.5	3.5	3.5	5.5	3.6
	Oil Capacity(L) 润滑油容量	1.1	1.1	1.1	1.65	0.6
	Working Temperature 工作温度	0°C~60°C				
	Dimensions 尺寸	800×480×710		815×480×710	680×415×540	20FT
Dimensions 尺寸	Net Weight(kg) 净重	75		98	32	160
	20FT	84		84	84	160

Model 型号		2200MB	2800M
Pump Model 泵型号	SML1512	SML1512	
Rated Pressure bar(PSI) 出水压力	154(2200)	193(2800)	
Flow Rate L/min(GPM) 流速	9.2(2.4)	9.2(2.5)	
Speed(rpm) 转速	1450	1450	
Power 功率	3KW	4KW	
High Pressure Pipe 高压管型号	8mm×10m	8mm×10m	
N.W./G.W. 净重/毛重	45/50	51/55	
Dimension(mm) 尺寸	690×400×500	690×400×500	
20FT	160	160	

**CHINA SEALINE  
COMPANY LIMITED**  
常州西莱特电力科技有限公司

**Sealine** POWER  
YOUR BEST POWER SELECTION  
**21/22**

# >>> MOBILE LIGHT TOWER SERIES 移动灯塔 <<<



**Quality Features:**

- \* Four 1000 watt lamps provide maximum illumination.
- \* Telescopic, mechanical, 2 stages mast up to 4.8 meters.
- \* Mast with self-locking makes work safer.
- \* Installed with 5KW diesel generator, the light tower works with convenient power supply.
- \* Quiet, dependable diesel engine provide flicker free operation.
- \* Manual winch for raising and lowering mast.
- \* Applicable for the situation that the illumination needs to be changed at any time, especially disaster relief, large assemblies, engineering repair, wharf and air port.



## Technical Sepcifications

Model 型号	SDGLB6000E/SDGLB6500SE	
<b>Mast 灯杆</b>		
Maximum extention of mast 灯杆最大伸缩高度	4.8m	
Raising/lowering mast 灯杆升降方式	Winch(Mechanical)开关/遥控	
Stages 灯杆节数	3	
Turing angle 转向角度	360 degrees non-continuous 360° 非连续性	
<b>Lamp 灯具</b>		
Total power of lamps 总功率	4x1000W	
Type of lamp 灯类型	Halide Lamp 卤化物灯	
Light capacity 照明能力	4x25000 Lumen 流明	
Voltage 电压	120/220/230/240V	
Frequency 频率	50/60Hz	
Lifetime of lamp 灯泡寿命	2000 hours 小时	
Working temperature 工作温度	≤85°C	
Connection protection index 连续防护指数	IP54	
<b>Characteristics of the generator 发电机特性</b>		
Model型号	SDG6000E/SDG6500SE	
Frequency(Hz) 频率	50	60
Rated power(KW) 额定功率	4.6	5
Standby power(KW) 最大功率	5	5.5
Engine model 动力型号	SE186FA	
Power outlets 插座数	2	
<b>Trailer 拖车</b>		
Stabilier supports 稳定支架	4 x Manual 手动	
Tire size 轮胎尺寸	8 inch	
Anti-wind capacity 防风能力	≤6	
Brakes 刹车	Manual 手动	
<b>Packing Dimension &amp; Weight 尺寸</b>		
Retracted Dimension(CM) 缩回最小尺寸	90x60x93, 168x14x18, 58x47x40/110x65x103, 135x14x18, 58x47x40	
Container load(20FT) 装柜数	36/28	
Net weight(KGS) 净重	150/205	



## >>> Vibartor 震动棒 <<<

Model 型号	SEV32	SEV38	SEV45	SEV50	SEV60
Engine Type 动力型号	Robin罗宾:EY20/Honda本田:GX160/Diesel柴油机:170F/Chinese Gasoline Engine仿本田:168F				
Vibrator Head(mm) 震动棒规格	¢ 32×450	¢ 38×450	¢ 45×500	¢ 50×500	¢ 60×500
Vibrator Amplitude(mm) 振幅	1	1.2	1.25	1.3	1.4
Vibrator Frequency 震动频率	225HZ				
Flexible pipe(m) 线缆长度	6				
Shaft Rotary Speed (rpm) 转速	3000 ~ 3600				
Operating Weight(kg) 净重	25				
Package Weight(kg) 毛重	27				
Driver Shipping Size(cm) 动力尺寸	53×38×54				
Poker Shipping Size(cm) 棒头尺寸	100×60×6				



## >>> POWER SAW 切割机 <<<

Model 型号	SECC300	SECC350	SECC400
Engine Type 动力型号	Honda本田:GX160/Chinese Gasoline Engine仿本田:168F	Chinese Gasoline Engine 仿本田:188F/Diesel柴油机:178F	Chinese Gasoline Engine 仿本田:188F/Diesel柴油机:186F
Power (hp) 功率	5.5	9	5.5
Operation Mass (kg) 净重	83	144	155
Max. Cutting Depth (cm) 最大切割深度	9	14	17
Blade Size (cm) 切割尺寸	30-35	30 ~ 40	35 ~ 50
Depth Adjustment 切割深度调整方式	Handle Rotation		
Driving 驱动方式	Manual push		
Water Tank capacity(L) 水箱容量	12	35	40
Dimension 尺寸	98×53×92	110×64×94	180×55×105

# >>> PLATE COMPACTOR

## 平板夯 <<<



Model 型号	SEC60	SEC80	SEC90	SEC90W(with water tank)
Engine Type 动力型号	Robin罗宾:EY20/Honda本田:GX160/Chinese Gasoline Engine仿本田:168F	Robin罗宾:EY20/Honda本田:GX160/Diesel柴油机:170F Chinese Gasoline Engine 仿本田:168F	Robin罗宾:EY20/Honda本田:GX160/Chinese Gasoline Engine仿本田:168F	Robin罗宾:EY20/Honda本田:GX160/Diesel柴油机:170F Chinese Gasoline Engine 仿本田:168F
Power kw(hp) 功率	5/5/5.5	5/5/4/5.5	5/5/5.5	5/5/5.5
Operation Mass (kg) 净重	63(66)/63(66)/64(67)	80(84)/80(84)/91(95)81(85)	86(82)/87(83)/97(93)87(83)	86(82)/87(83)/87(83)
Frequency (vpm) 频率	5600		4500	
Centrifugal Force (KN) 激振力	12	15	20(15)	87(83)
Compaction Depth (cm) 压实深度		30		
Travel Speed (cm/s) 运行速度		30		
Efficiency (m <sup>2</sup> /hr) 压实效率	500		600	
Plate Size (cm) 底板尺寸	120×38×90	118×42×98	106×45×100(118×42×98)	106×45×100(118×42×98)
Dimension (cm) 包装尺寸	80×41×67	78×45×67	60×47×76(75×53×70)	60×47×76(75×53×70)

Model 型号	SEC100	SEC140	SEC160B(forward and reverse)	SEC330B(forward and reverse)
Engine Type 动力型号	Robin罗宾:EY20/Honda本田:GX160/Diesel柴油机:170F Chinese Gasoline Engine 仿本田:168F		Robin罗宾:EY20/Honda本田:GX160/Diesel柴油机:170F Chinese Gasoline Engine 仿本田:168F	Diesel柴油机:178F/Honda本田:GX160
Power kw(hp) 功率	5/5/4/5.5		6/5	9
Operation Mass (kg) 净重	89/90/100/90	97/98/108/98	170	255
Frequency (vpm) 频率		4500	4200	3750
Centrifugal Force (KN) 激振力		20	30	38
Compaction Depth (cm) 压实深度	30		50	90
Travel Speed (cm/s) 运行速度	25	30	25	21
Efficiency (m <sup>2</sup> /hr) 压实效率		600	700	850
Plate Size (cm) 底板尺寸	100×46×85	106×45×95	100×50×110	178×67×90
Dimension (cm) 包装尺寸	68×50×85	75×50×75	79×58×110	96×73×95

>>> SPARE PARTS-SOCKET  
配件-插座 <<<

英式 Industrial Socket												
	① 250V 13A	② 200-250V 16A	③ 200-250V 32A	④ 220-250V 16A	⑤ 110-130V 16A	⑥ 250V 13A	⑦ 125V 16A	⑧ 125V 32A	⑨ 250V 32A	⑩ 250V 16A (a)	⑪ 200-346 240-415 16A	⑫ 200-346 240-415 16A
欧式 Europeat Socket												
											⑬ 250V 16A	⑭ 250V 16A
美式 Americar Socket												
	⑮ 125V 30A	⑯ 250V 30A	⑰ 125-250V 30A	⑱ 125V 20A	⑲ 125V 20A	⑳ 125V 20A	㉑ 125V 20A	㉒ 125V 20A	㉓ 125V 20A	㉔ 125V 20A		
澳式 Australia Socket												
				㉕ 250V 10A	㉖ 250V 15A							
其他 Others												
	㉗ 250V 16A	㉘ 250V 10A	㉙ DC12V 10A									

>>> POWER TROWEL 抹平机 <<<

Model 型号	SE-S80H/SE-S90H/SE-S100H/SE-S120H			
Engine 动力型号	Robin:EY20	Honda:GX160	Diesel:178F	Chinese Gasoline Engine:168F
Power(HP) 功率	5	5	6	5.5
Trowel Diameter(mm) 磨刀直径	80/92/92/92			
Travel Speed(rpm) 运行速度	60-125			



>>> RAMMER 冲击夯 <<<

Model 型号	SE-RM80HC	
Engine Type 动力型号	Honda:GX110	Chinese Gasoline Engine 仿本田:168F
Power kw(HP) 功率	5.5	
Net Weight(KG) 净重	68	
Hit Frequency 每分钟冲击速度	450-650	
Impact Force(kN) 冲击强度	10	
Jump Height(MM) 跳跃高度	40-65	
Fuel Tank Capacity(L) 油箱容量	2.8	
Plate Size (CM) 底板尺寸	33×28.5	
Dimensions (CM) 包装尺寸	76×53×112	